


NOTES

1. The works area is approximately 184m long by 14.3m wide.
2. Remove all surface vegetation.
3. Starting at the lower end of the works, the area immediately upstream of the weir is to be cleared of silt to bed level for a distance of approximately 40m, to extend over the full width of the channel.
4. The remaining 140m of brook is to have exposed silt reduced in height to near water level and to have the existing free channel widened and excavated to natural bed level.

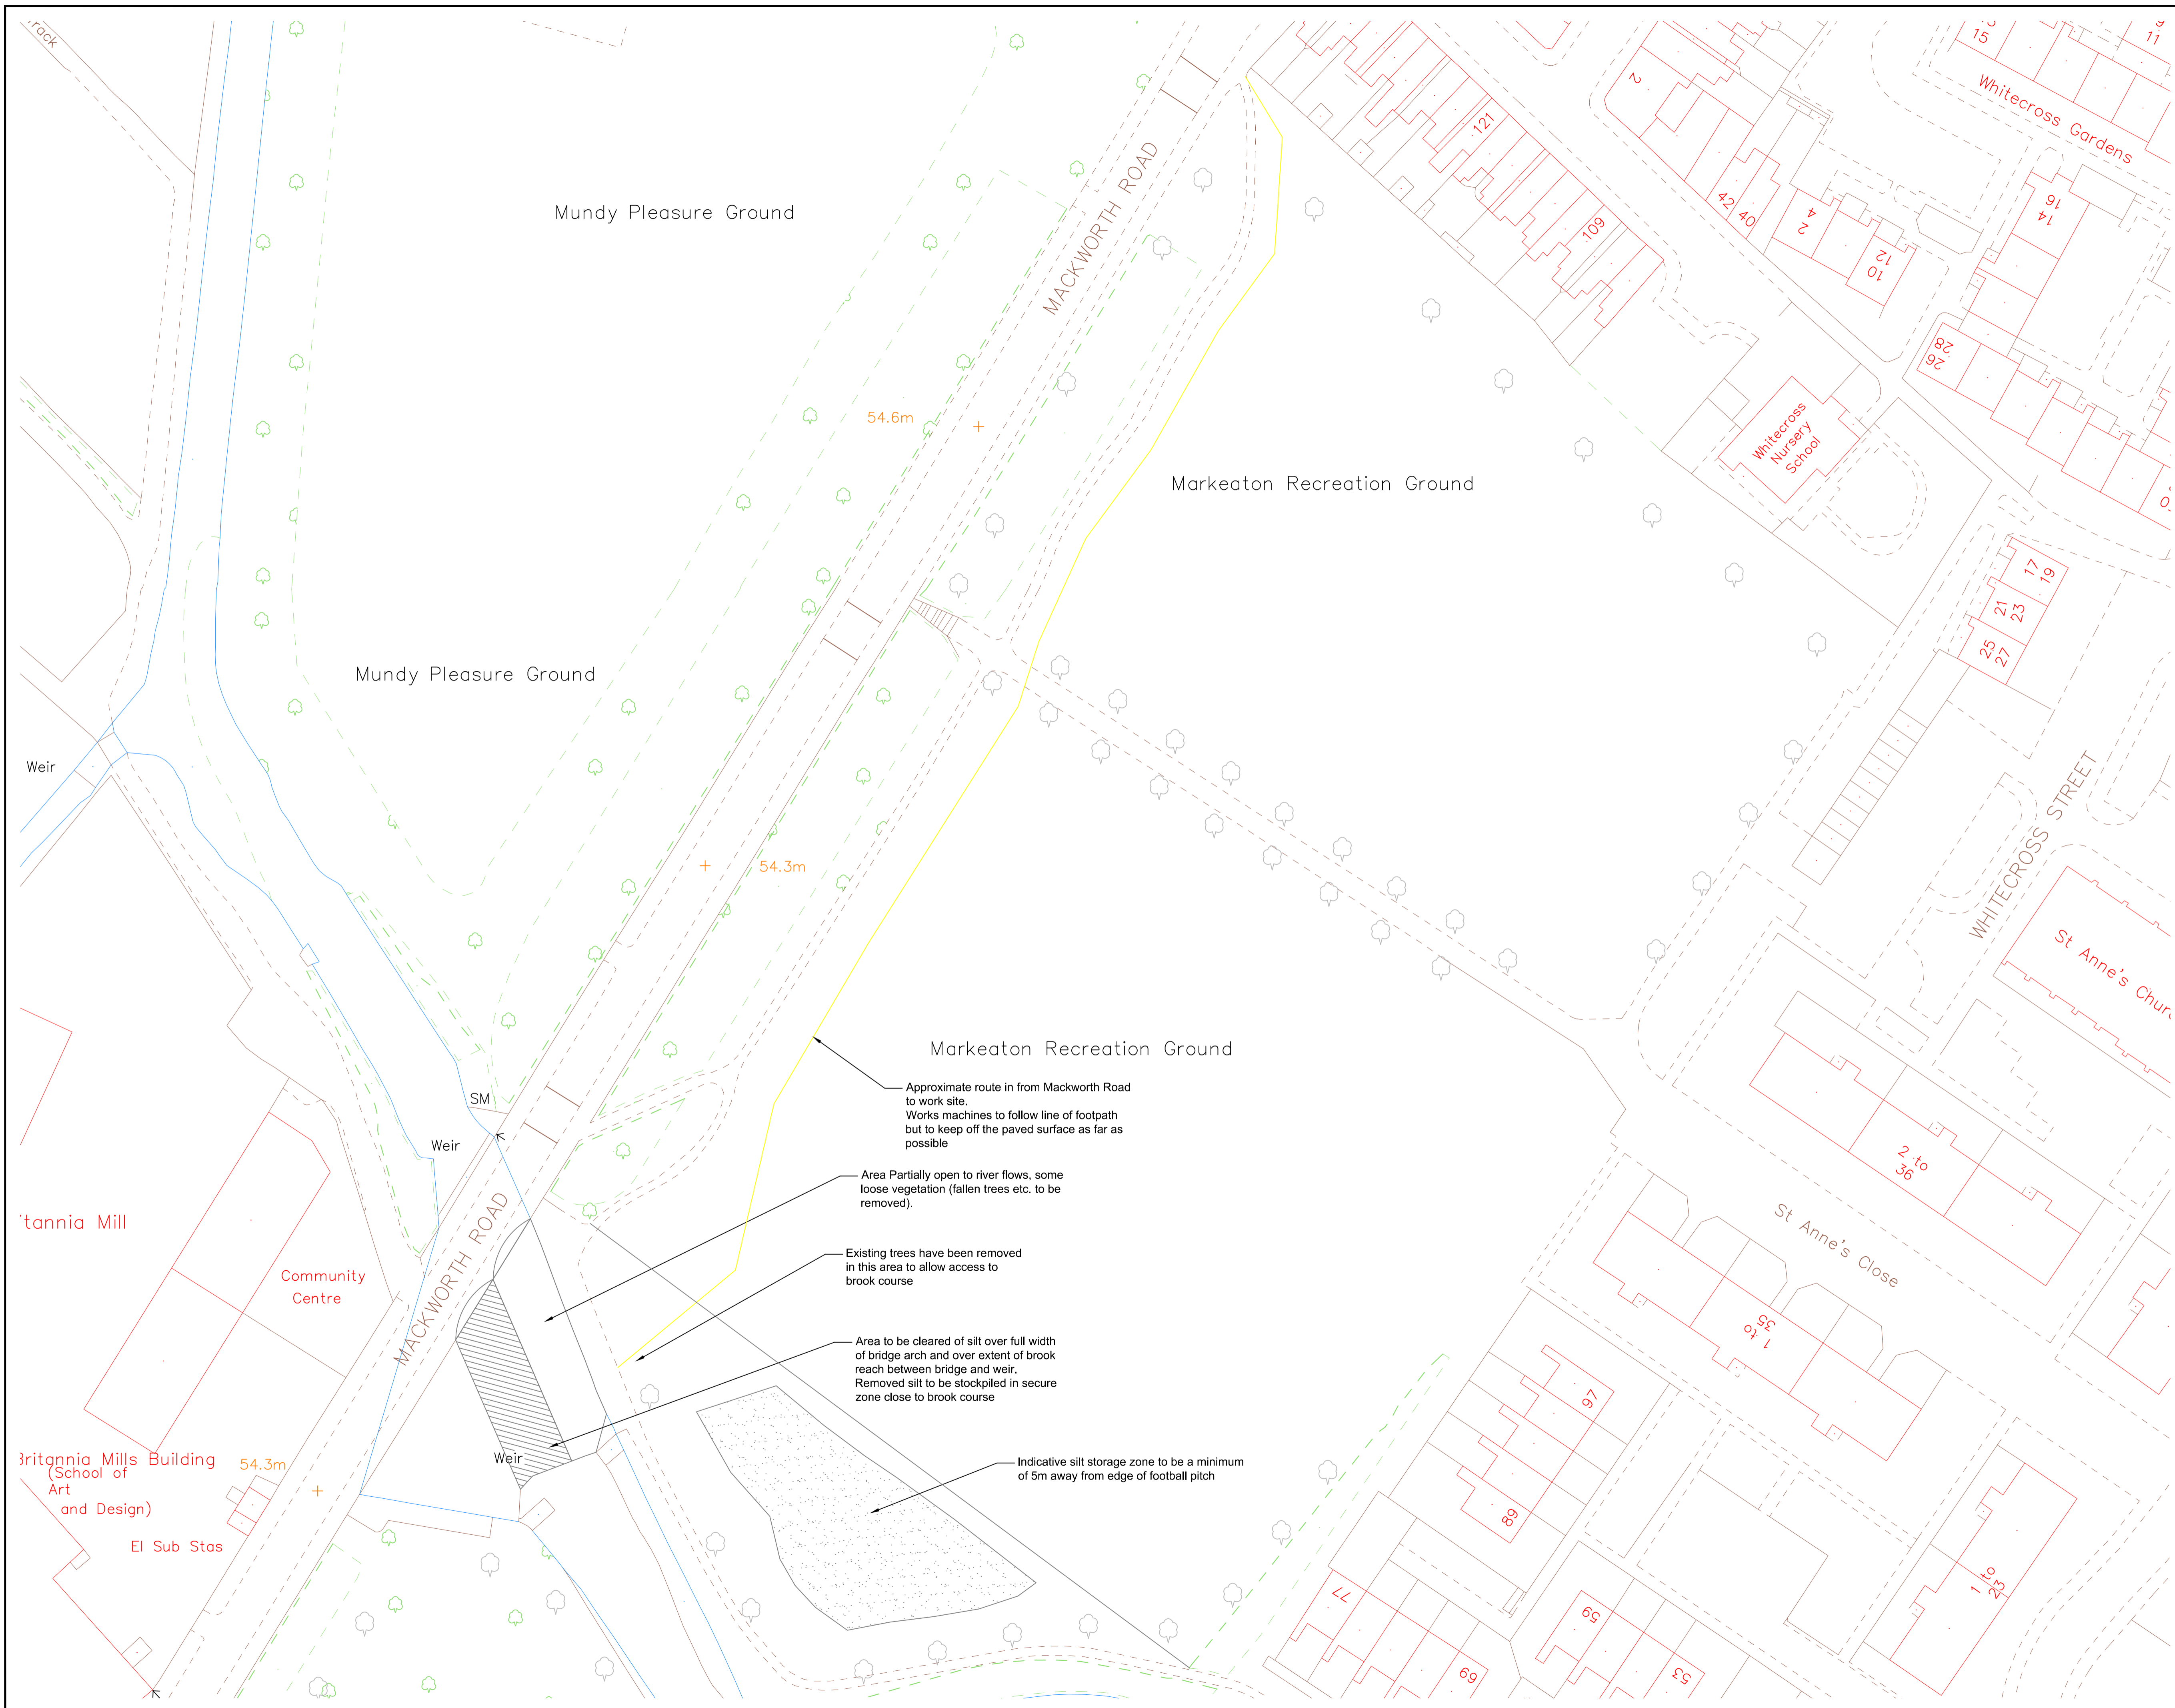

BY	CHKD	DATE	REV.

AMENDMENT DETAILS			
DRAWN BY	CHECKED BY	APPROVED BY	SCALE
			500
DATE		DATE	

ORIGINAL DRAWING SIZE 841 x 594 (A1)



**NEIGHBOURHOODS**  
 Director  
 Christine Durrant  
 Council House  
 Corporation Street  
 Derby DE1 1FS  
 Tel (01332) 293111, Fax (01332) 643299

**PROJECT TITLE**  
 MARKEATON BROOK DESILT  
 PHASE 2  
 MACKWORTH ROAD

**DRAWING TITLE**  
 GENERAL LAYOUT DRAWING  
 TO SHOW EXTENT AND  
 TYPE OF WORKS

<b>PROJECT REFERENCE NUMBER</b>	LD10197	<b>REVISION</b>	
<b>DRAWING NUMBER</b>	103		